

Mlift



OPB5E Medium Level Order Picker 0.5t

OPB5E

Medium Level Order Picker 0.5t

Distinguishing mark							
1.1	Model designation		OPB5E(3200)	OPB5E(3600)	OPB5E(4100)	OPB5E(4880)	
1.2	Drive unit		Electrics	Electrics	Electrics	Electrics	
1.3	Operation type		standing	standing	standing	standing	
1.4	rated capacity on front platform	Q ₁	lb. kg	227	227	△227	△227
	rated capacity on behind platform	Q ₂	lb. mm	137	137	137	137
	rated capacity on standing platform	Q ₃	lb. mm	136	136	136	136
1.5	Wheelbase	y	in. mm	1150	1150	1150	1256
Weight							
2.1	Service weight (include battery)		lb. kg	1160	1230	1340	1530
2.2	Axle loading, laden driving side/loading side		lb. kg	680/980	710/1020	740/1100	780/1220
2.3	Axle loading, unladen driving side/loading side		lb. kg	490/670	500/730	520/820	540/990
Type, Chassis							
3.1	Tyre type driving wheels/loading wheels		In. mm	polyurethane/rubber	polyurethane/rubber	polyurethane/rubber	polyurethane/rubber
3.2	Tyre size, driving wheels (diameter*width)		In. mm	Φ230x75	Φ230x75	Φ230x75	Φ230x75
3.3	Tyre size, loading wheels (diameter*width)		In. mm	Φ204x76	Φ204x76	Φ204x76	Φ204x76
3.4	Tyre size, caster wheels (diameter*width)		In. mm	Φ74x48	Φ74x48	Φ74x48	Φ74x48
3.5	Wheels, number driving, caster/loading (x=drive wheels)		In. mm	1x, 2/2	1x, 2/2	1x, 2/2	1x, 2/2
3.6	Tread, Front		b10 mm	566	566	566	626
3.7	Tread, Rear		b11 mm	724	724	724	784
Dimensions							
4.1	Height, mast lowered		h1 mm	1510	1590	2080	2090
4.2	Lift height		h3 mm	2950	3350	3850	4630
4.3	Height, mast (extended)		h4 mm	4540	4940	5970	6750
4.4	Height of overhead guard (cabin)		h6 mm	1590	1670	2120	2120
4.5	Seat height/standing height		h7 mm	250	250	250	250
4.6	Stand height, elevated		h12 mm	3200	3600	4100	4880
4.7	Overall length		L1 mm	1500	1500	1500	1610
4.8	Overall width		b1/b2 mm	800	800	800	860
4.9	Ground clearance, center of wheelbase		m2 mm	50	50	50	50
4.10	Front cargo platform width		mm	800x520	800x520	800x520	800x520
4.11	Initial height of front cargo platform		mm	1082	1082	1082	1082
4.12	Control handle height		mm	1010	1010	1010	1010
4.13	Behind platform width		mm	346x660	346x660	346x660	346x660
4.14	Overall length platform launch		L3 mm	1795	1795	1795	1905
4.15	The channel width		Ast mm	2005	2005	2005	2070
4.16	Turning radius		Wa mm	1385	1385	1385	1450
Performance data							
5.1	Drive speed, laden/unladen of height (0-520mm)		mph km/h	5.5	5.5	5.5	5.5
	Drive speed, laden/unladen of height (520-1940mm)		mph km/h	3.7	3.7	3.7	3.7
	Drive speed, laden/unladen of height (1940-2600mm)		mph km/h	2.6	2.6	2.6	2.6
	Drive speed, laden/unladen of height (2600 to max height)		mph km/h	1	1	1	1
5.2	Lifting speed, laden / unladen		fpm m / s	0.17 / 0.21	0.17 / 0.21	0.17 / 0.21	0.17 / 0.21
5.3	Lowering speed, laden / unladen		fpm m / s	0.35 / 0.26	0.35 / 0.26	0.35 / 0.26	0.35 / 0.26
5.4	Max. gradeability, laden / unladen		%	0	0	0	0
5.5	Service brake type			Electromagnetic	Electromagnetic	Electromagnetic	Electromagnetic
Electric-engine							
6.1	Drive motor rating S2 60min		hp kW	1.7	1.7	1.7	1.7
6.2	Lift motor rating at S3 15%		hp kW	2.2	2.2	2.2	2.2
6.3	The maximum allowed size battery		in. mm	200x740x670	200x740x670	200x740x670	280x800x670
6.4	Battery voltage / nominal capacity K20		V/Ah	24V/224AH	24V/224AH	24V/224AH	24V/280AH
6.5	Battery weight		ib. kg	163	163	163	250
Additional data							
7.1	Type of drive control			AC	AC	AC	AC
7.2	Steering type			Electronic	Electronic	Electronic	Electronic
7.3	Sound pressure level at the driver's ear		dB(A)	74	74	74	74

Note: For detailed customization, features and benefits of the truck, please contact your local dealership for more information.

Improvement made to truck may result in changes to the truck parameters.

1.The parameters in the table are of the standard model. For more information, please contact us.

2.The parameters are subject to change without notice.

OPB5E

The OPB5E vertical order picker helps you increase productivity in your warehouse while reducing the risk of injuries. With its heavy duty, stable mast and a large working platform, the OPB5E order picker will give your employees the safety they need to work efficiently.



Application



The OPB5E can elevate an operator up to as much as 4880mm, turn around in as little as 1385mm, and can be driven while lifted and diagonally to move from task to task.

Travel is provided by a high efficiency AC drive motor that can be programmed through the onboard LCD dash, while power comes from a 224AH AGM maintenance free battery pack that supports opportunity charging from a standard 230V outlet. Option for a bigger size industrial battery with external charger is available.



Productivity

The OPB5E vertical order picker is a unique product. Positioned between low level order picker, ladders and extremely cost intense VNA trucks, the OPB5E order picker gives you the ability to pick products as a height of up to 6.5 meters while using a compact, and very stable truck at a reasonable price level. Designed for the E-Commerce and small goods picking environment this product will help you improve productivity and increase safety in the warehouse and in the shopfloor aisles.

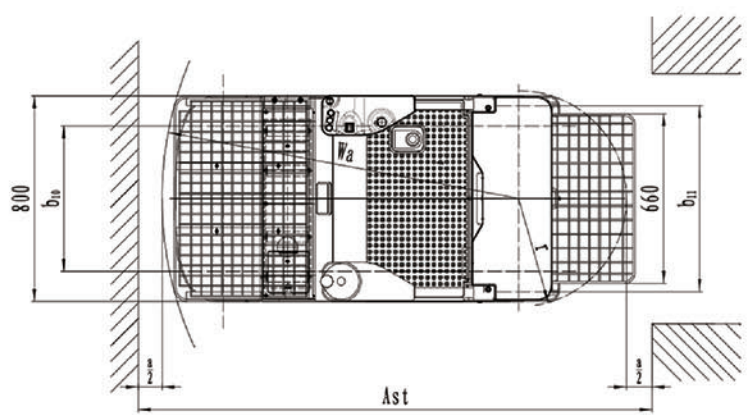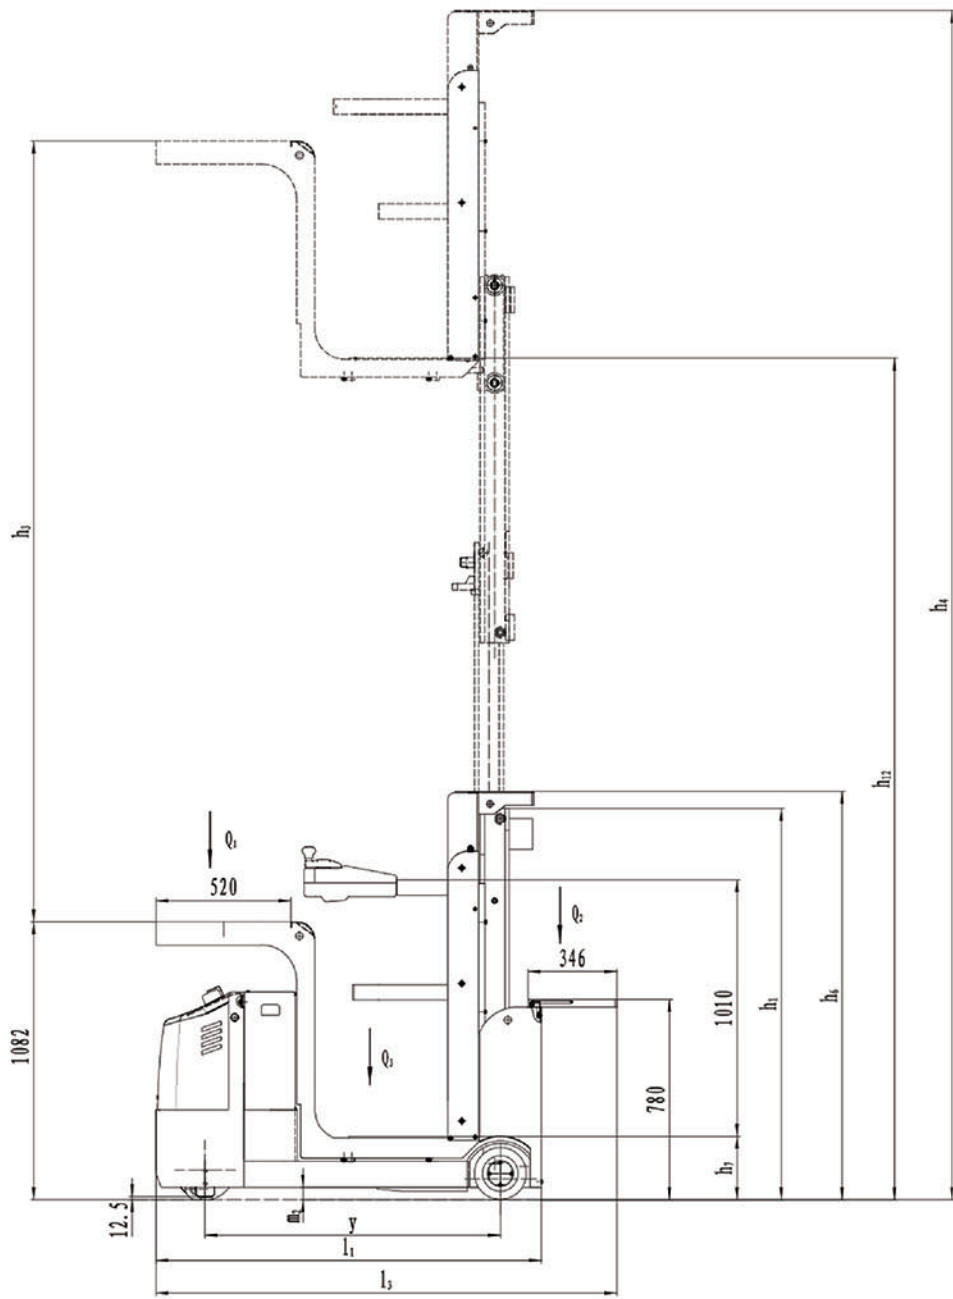

2020 by MLAP, All Rights Reserved.
 All Trademarks are the property of their respective owners.
 Printed in Singapore.
 FML00015 (09/20)